

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
28 April 2005 (28.04.2005)

PCT

(10) International Publication Number
WO 2005/037520 A1

(51) International Patent Classification⁷: **B29C 45/42**,
B29B 11/08, B29C 45/72, 49/42

(74) Agent: **GERVASI, Gemma**; Notarbartolo & Gervasi
S.p.A., Corso di Porta Vittoria 9, I-20122 Milano (IT).

(21) International Application Number:
PCT/EP2004/052440

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(22) International Filing Date: 5 October 2004 (05.10.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
RM2003A000459 7 October 2003 (07.10.2003) IT

(71) Applicant (for all designated States except US): **S.I.P.A.
SOCIETÀ INDUSTRIALIZZAZIONE PROGET-
TAZIONE E AUTOMAZIONE S.P.A.** [IT/IT]; Via
Caduti del Lavoro 3, I-31029 Vittorio Veneto (IT).

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **ZOPPAS, Matteo**
[IT/IT]; Via S. Pellico, 46, I-33074 Fontana Fredda (IT).
CORAN, Massimo [IT/IT]; Via Colombo 32, I-31027
Spresiano (IT). **PAVANETTO, Jader** [IT/IT]; Via Martiri
Di Marzabotto, 94, I-30174 Mestre (IT).

Published:

— with international search report

[Continued on next page]

(54) Title: DEVICE AND PROCESS FOR EXTRACTING PLASTIC ITEMS

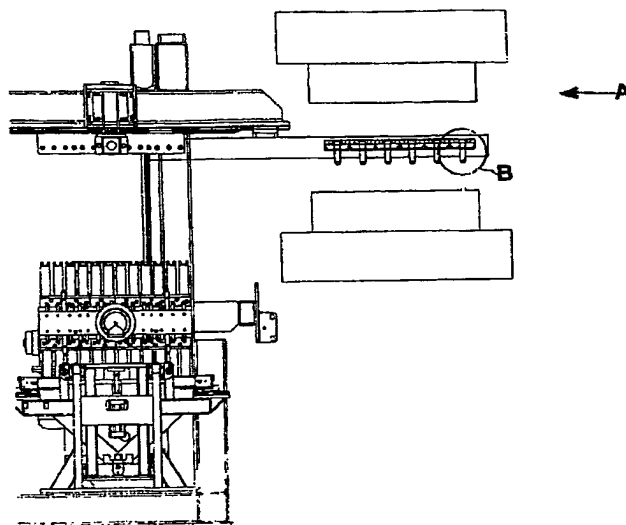

(57) Abstract: A device and process for extracting plastic preforms (5) from holders. Said device comprises a plate (23), which features straight slits (26) positioned parallel to each other, that is attached to a supporting table (20, 21). Each slit (26) comprises wider sections and constrictions (29, 30), which have a width (L2) smaller than the diameter of the ring (9) of the preform, so that the ring (9) can be fitted into the slit (26) through the wider section. The plate (23) is moved in the direction «D» by a specific length until the constrictions are positioned under the ring, and, thus, the preforms are removed by moving the plate away from the holders.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.